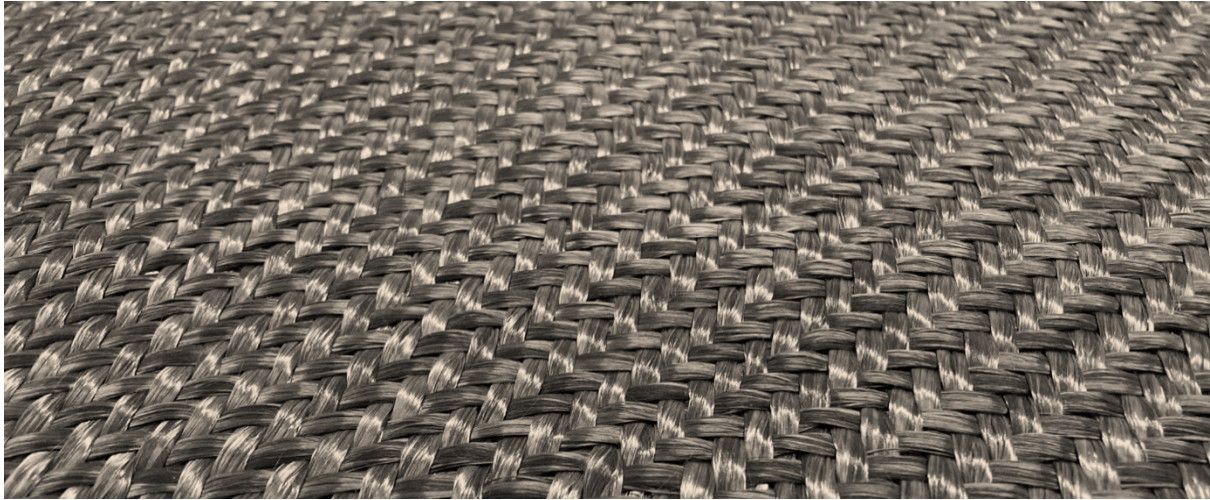


PRODUCT DATA SHEET

B24-009 COM-12KCF-PP-1195T-TW-574

Thermoplastic prepreg - Bidirectional Twill 2/2 made with 12K CF/PP hybrid yarns.

**PROPERTIES**

Property	Value
Fiber areal weight (FAW)	365g/m ²
Weight per ply (PAW)	574g/m ²
Resin content by weight	36% PP
Consolidated ply thickness (CPT)	0,45 mm

FABRIC DESIGN

Property	Value
Fiber	CF/PP
Pattern	Twill 2/2
Width	100cm
<i>Contact us for special widths</i>	
Density	2,4picks/cm

TYPICAL NEAT RESIN PROPERTIES

Property	Value
Density	0,90 g/cm ³
Tm (melt)	160°C
Tp (processing)	190°C

MAIN FEATURES:

- Flexible
- Recyclable
- Short Time Processing
- Easy to manipulate and cut

TYPICAL APPLICATIONS:

- Sports goods
- Automotive

The described values in this technical sheet are the estimated results obtained in the TEXFIRE TEXTILS TECNICS S.L internal laboratory according to standard methodologies. TEXFIRE reserves the right to change the parameters without the obligation to notice it previously.



www.blackfabric.eu
info@blackfabric.eu

C/LLobateres, 29- 08210 Barberà del Vallès, Spain