


PRODUCT DATA SHEET

B24-011 COM-3KCF-PC-300T-TW-300

Thermoplastic prepreg - Bidirectional Twill 2/2 made with 3K CF/PC hybrid yarns.

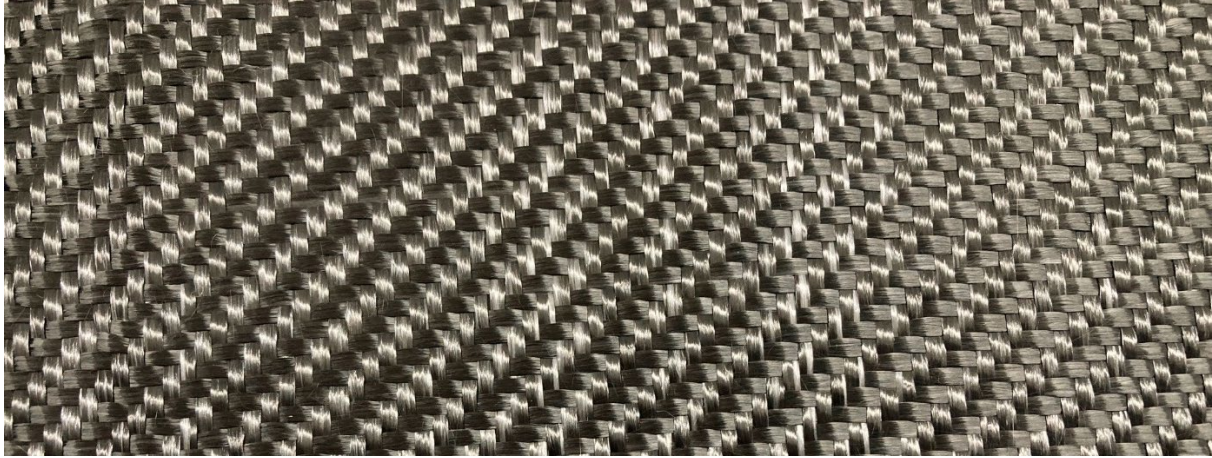

PROPERTIES

Property	Value
Fiber areal weight (FAW)	192g/m ²
Weight per ply (PAW)	300g/m ²
Resin content by weight	36% PC
Consolidated ply thickness (CPT)	0,18 mm

FABRIC DESIGN

Property	Value
Fiber	CF/PC
Pattern	Twill 2/2
Width <i>Contact us for special widths</i>	100cm
Density	5 picks/cm

TYPICAL NEAT RESIN PROPERTIES

Property	Value
Density	1,2g/cm ³
Tg	140°C
Tm (melt)	258°C
Tp (processing)	290°C

MAIN FEATURES:

- Flexible
- Recyclable
- Short Time Processing
- Easy to manipulate and cut

TYPICAL APPLICATIONS:

- Sports goods
- Automotive
- Renewable Power
- Aesthetics

The described values in this technical sheet are the estimated results obtained in the TEXTFIRE TEXTILS TECNICS S.L internal laboratory according to standard methodologies. TEXTFIRE reserves the right to change the parameters without the obligation to notice it previously.

